MAIL RECORDED COPY TO OWNER COyote Club LC 2425 S 3200 W Sait Lake City, UT. 84119

AND MAIL RECORDED COPY TO: St. George City 175 East 200 North St. George, UT 84770

Tax ID: SG-5-3-17-332

DOC # 20220036045 Agreement Page 1 of 31 Gary Christensen Washington County Recorder 07/21/2022 11:57:47 PM Fee \$ 0.00 By ST GEORGE CITY WILL LITHING LIMINATION TO

CITY OF ST. GEORGE LONG-TERM STORMWATER MAINTENANCE AGREEMENT WITH COYOTE CLUB LC FOR GREAT WESTERN SUPPLY

This Long-Term Stormwater Maintenance Agreement ("Agreement") is made and entered into this 29¹⁵ Jone 2022 by and between the City of St. George, a municipal corporation, with offices at 175 East 200 North, St. George, Utah 84770 ("City"), and Coyote Club DC, with offices at 2425 S 3200 W, Salt Lake City, UT 84119 ("Owner").

RECITALS

WHEREAS, City is authorized and required to regulate and control the disposition of storm and surface waters within its boundaries, as set forth in the City of St. George Code, Stormwater Management, Title 9 Chapter 14, as amended ("Ordinance"), adopted pursuant to the Utah Water Quality Act, and pursuant to City's MS4 Permit which requires stormwater runoff to be managed by the use of Stormwater Facilities and best management practices; and

WHEREAS, Owner owns real property located in the City of St. George, Washington County, Utah and more particularly described in Exhibit A and incorporated herein as part of this Agreement ("Property"); and

WHEREAS, Owner recognizes that post construction storm water facilities ("Facilities") shall be installed or were installed pursuant to the approved development plans and specifications for the Property and must be maintained; and

WHEREAS, City and Owner have determined that it is in the best interest of the health, safety and welfare of the citizens of the City that the Facilities be constructed and maintained on the property and that Owner must maintain those Facilities.

AGREEMENT

NOW, THEREFORE, in consideration of the foregoing, the mutual covenants contained herein, and the following terms and conditions, the parties hereto agree as follows:

1. **RECITALS.** The Recitals above are hereby incorporated as part of this Agreement and are binding on the parties.

SG Legal Approved as to Form: 01.10.2022

Long-Term Stormwater Maintenance Agreement Page 1 of 8

- 2. FACILITIES. The Facilities shall be or have been constructed by Owner in accordance with the approved plans and specifications for the development. Owner shall, at its sole cost and expense, operate and maintain the Facilities in good working condition and in accordance with the Schedule of Long-Term Maintenance Activities agreed hereto and attached as Exhibit B. Owner shall report biennially to the City on the City's approved forms or City's online reporting system detailing compliance with the requirements of this Agreement. Owner's Long-Term Stormwater Management Plan, (LTSWMP), is attached as Exhibit C. The LTSWMP must be adapted when site conditions and operations change and when existing programs are ineffective. Owner shall maintain the Property in compliance with this plan. When the plan is updated, the new LTSWMP shall be filed with the City Public Works Department and shall replace the LTSWMP on file with the City. The updated LTSWMP shall not be recorded.
 - 3. ACCESS AND INSPECTIONS. Owner hereby grants permission to City, its authorized agents and employees, to enter upon the Property to inspect the Facilities whenever City deems necessary. City shall not unreasonably interfere with the business operations on Property. Except in case of an emergency, City shall give at least a 24-hour notice to Owner prior to entry. Notice may be given by posting the Property. Facilities shall be maintained in a manner that makes them available for inspection and maintenance. All inspections shall be conducted in a reasonable manner and at reasonable times. The purpose of the inspection shall be to determine and ensure that the Facilities are adequately maintained, are continuing to perform in an adequate manner, and are in compliance with all City requirements.
 - 4. FAILURE TO MAINTAIN. In the event Owner fails to maintain the Facilities in good working order and in a manner that makes them available for inspection. City shall give written notice to Owner to cure such defects or deficiencies with a reasonable time frame for compliance. If Owner fails to comply within the timeframe City may enter the Property to cure the defects.
 - 5. RIGHT TO CURE DEFECTS. Owner hereby authorizes City, its authorized agents and employees, to enter upon the Property to cure the defects if Owner has failed to cure them within the reasonable time frame given for compliance. In case of an emergency, City may enter the Property immediately, without notice, and make the repairs. Owner is solely liable for maintenance of the Facilities. It is agreed that City shall have the right, but not the obligation, to elect to perform any or all of the maintenance activities if, in the City's sole judgment, Owner has failed to perform the same. City makes no representation that it intends to or will perform any of the maintenance activities and any election by City to perform any of the maintenance activities, shall in no way relieve Owner of its continuing maintenance obligations under this Agreement. If City elects to perform any of the maintenance activities, City shall be deemed to perform such work without warranty or representation as to the safety or effectiveness of such work, the work shall be deemed to be accepted by Owner "as is" and shall be covered by Owner's indemnity provisions below. If City performs any of the necessary maintenance activities Owner shall pay all of City's reasonable costs incurred in performing those necessary maintenance activities. Owner's obligation to pay City's costs of performing necessary maintenance activities is a continuing

G Legal Approved as to Form: 01,10,2022

Long-Term Stormwater Maintenance Agreement Page 2 of 8

obligation.

- 6. <u>COSTS</u>. Owner shall reimburse City within thirty (30) days of receipt of an invoice for the costs incurred by City in performing necessary maintenance activities. If not paid within the prescribed time period, City shall have the right to file a lien against the Property in the amount of such reasonable costs. The actions described in this section are in addition to and not in lieu of any and all legal remedies available to City as a result of Owner's failure to maintain the Facilities.
- 7. NO ADDITIONAL MABILITY. It is the intent of this Agreement to insure the proper maintenance of the Pacilities by the Owner. This Agreement shall not be deemed to create or affect any additional liability of any party for damage alleged to result from or caused by storm water runoff.
- 8. EXHIBITS. All exhibits/figures attached hereto are incorporated as part of this Agreement, except updates to Exhibit C shall not be recorded but shall be kept at the City Public Works Department.
- AGREEMENT TO RUN WITH THE LAND. This Agreement shall be recorded at the Recorder's Office of Washington County and shall constitute a covenant running with the land and shall be binding on Owner only for such time as Owner holds title to the Property and shall run with the land and pass to subsequent owners while they own the Property.
- 10. <u>COMPLIANCE WITH APPLICABLE LAWS</u>. Owner expressly acknowledges and agrees that nothing in this Agreement shall be deemed to relieve Owner from any obligation to comply with all applicable requirements of City, state and federal law including the payment of fees and compliance with all other applicable ordinances, resolutions, regulations, policies and procedures of City, except as modified, waived or declared in this Agreement.
- 11. <u>INTEGRATION</u> This Agreement contains the entire Agreement with respect to the subject matter hereof and integrates all prior conversations, discussions or understanding of whatever kind or nature and may only be modified by a subsequent writing duly executed by the parties hereto. In the event of a conflict between this Agreement and any other documents with Owner, this Agreement shall govern.
- exercise of the police power by the City in enacting zoning subdivision, development, transportation, environmental, open space and related land use plans, policies, ordinances and regulations after the date of this Agreement. This Agreement is not intended to and does not bind the St. George City Council in the independent exercise of its legislative discretion with respect to such zoning regulations.
- 13. **INDEMNITY AND LIABILITY.** City shall not be liable for Owner's stormwater or the Facilities. Owner shall indemnify, defend and hold harmless City, employees, elected officials, officers, and agents to the extent each of them is acting in their official capacity on

SG Legal Approved as to Form: 01.10.2022

Long-Term Stormwater
Maintenance Agreement
Page 3 of 8

behalf of the City collectively "City") against all claims, demands, causes or action suits or judgments, including but not limited to all claims, demands, causes of action, suits or judgments for death or injuries to persons or for loss of or damage to property, arising out of Owner's breach of this Agreement. Notwithstanding, this indemnification obligation shall not include an indemnification of the City for claims, demands, causes or action, liabilities, damages, suits or judgments arising out of the City's negligence. In the event of any such claims made or suits filed against City, City shall give Owner prompt written notice. Owner agrees to defend against any such claims brought or actions filed against City, whether such claims or actions are rightfully or wrongfully brought or filed. Owner agrees that City may employ attorneys of its own selection to appear and defend the claim or action on its own behalf at the expense of Owner. Said attorney fees shall be reasonable and subject to review by Owner. Owner shall be responsible for all reasonable costs associated with any claim, demand, action, suit or judgment including reasonable attorney fees for which they indemnify or defend City. If any judgment or claims are entered against City, its authorized agents or employees, Owner shall pay for all reasonable costs and expenses in connection herewith.

- **<u>COMMON INTEREST DEVELOPMENTS.</u>** If the Property is developed as a Common Interest Development which is defined as membership in or ownership of an "Association" which is responsible for some or all of the commonly owned or controlled area, then the following provisions shall apply during such time as the Property is encumbered by a "Declaration", and the Common Area is managed and controlled by the Association.
 - (a) The Association, through its Board of Directors, shall assume full responsibility to perform the maintenance activities required pursuant to this Agreement, and shall undertake all actions and efforts necessary to accomplish the maintenance activities, including but not limited to, levying regular or special assessments against each member of the Association sufficient to provide funding for the maintenance activities, conducting a vote of the membership related to such assessments if required.
 - No provision of the Declaration, nor any other governing document of the Association or grant of authority to its members, shall grant or recognize a right of any member or other person to alter, improve, maintain or repair any of the Property in any manner which would impair the functioning of the Facilities. In the event of any conflict between the terms of this Agreement and the Declaration or other Association governing documents, the provisions of this Agreement shall prevail.
- 15. NO WAIVER OF GOVERNMENTAL IMMUNITY. Nothing in this Agreement is intended to or shall be deemed to be a waiver of the City's governmental immunity as set forth in applicable statutory law and case law except as otherwise set forth herein.
- 6. GOVERNING LAW AND VENUE. This Agreement shall be construed according to the laws of the State of Utah. The parties agree that jurisdiction and venue for all legal actions, unless they involved cause of action with mandatory federal jurisdiction, shall be the Fifth District Court, Washington County, State of Utah. The parties further agree that the Federal District Court for the District of Utah shall be the venue for any cause of action with mandatory federal jurisdiction.
- 17. LECAL FEES. Should any party default on any of the covenants or agreements contained

SG Legal Approved as to Form: 01 10 2022

Long-Term Stormwater Maintenance Agreement Page of 8

herein, the defaulting party shall pay all costs and expenses, including reasonable attorney's fees, which may arise or accrue from enforcing this Agreement or in pursuing any remedy provided hereunder or by applicable law, whether such remedy is pursued by filing a lawsuit or otherwise. This obligation of the defaulting party to pay costs and expenses includes, without limitation, all costs and expenses, including reasonable attorney's fees incurred for appeals and bankruptcy proceedings. If either party commences legal action to interpret any term of this Agreement, the prevailing party shall be entitled to recover all reasonable attorneys' fees, court costs, and any other costs incurred in connection with such action.

> 18. NOTICES. All notices required herein, and subsequent correspondence in connection with this Agreement shall be mailed to the following:

City of St. George Attn: City Attorney 175 East 200 North St. George, Utah, 84770

Coyote Club LC Attn: Scott Jenkins 2425 S 3200 W Salt Lake City, UT. 84119

Such notices shall be deemed delivered following the mailing of such notices in the United States mail. Adequate notice shall be deemed given at the addresses set forth herein unless written notice is given by either party of a change of address.

- 19. SUCCESSORS AND ASSIGNS. Owner shall not assign, sublet, sell, transfer, or otherwise dispose of any interest in this Agreement, including to any type of owner's association, without assigning the rights and the responsibilities under this Agreement. This Agreement shall be binding upon and inure to the benefit of the parties hereto, their successors and permitted assigns, but shall not inure to the benefit of any third party of other person.
- 20. NO JOINT VENTURE, PARTNERSHIP OR THIRD-PARTY RIGHTS. It is not intended by this Agreement to, and nothing contained in this Agreement shall, create any partnership, joint venture or other arrangement between the parties. No term or provision of this Agreement is intended to or shall be for the benefit of any person, firm, organization or corporation not a party hereto, and no such other person, firm, organization or corporation shall have any right or cause of action hereunder.
- SEVERABILITY. If any provision of this Agreement is declared invalid by a court of competent jurisdiction, the remaining provisions shall not be affected, and shall remain in full force and effect.
- 22. CONSTRUCTION Each of the parties hereto has had the opportunity to review this Agreement with counsel of their choosing and the rule of contracts requiring interpretation of a contract against the party drafting the same is hereby waived and shall not apply in interpreting this Agreement.
- 23. SURVIVAL. It is expressly agreed that the terms, covenants and conditions of this Agreement

G Legal Approved as to Form: 01,10,2022

Long-Term Stormwater Maintenance Agreement Page 5 of 8

shall survive any legal act or conveyance required under this Agreement.

- 24. HEADINGS. The section and other headings in this Agreement are for reference purposes only and shall not in any way affect the meaning or interpretation of this Agreement.
 - 25. COUNTERPARTS. This Agreement may be executed in counterparts each of which shall be an original and shall constitute one and the same agreement.
 - 26. AUTHORITY OF PARTIES. The parties executing this Agreement hereby warrant and represent that they are duly authorized to do so in the capacity stated.

IN WITNESS WHEREOF, the parties have executed this Agreement the day and year first above written.

CITY: CITY OF ST. GEORGE	OWNER: Coyote Club LC
Un uchilly Tuncker	SEA Scott Ferhing
Michele Randall, Mayor	OWNER: Coyote Club LC Stephens Cott Jenkins, Member Approved as to form
ATTESTED.	approved as to form
SIMILI DAMEN	Cul. Jack for
Christina Fornandez, City Recorder NMEUL TUKKIN DEPUTA	Jami R Brackin, Deputy City Attorney
	Notary Public - State of Utah ASHLEY ANDERSON
STATE OF UTAH Davis County of Washington	Comm. #713901 My Commission Expires
Davis County of Washington	September 1, 2024
14	pefore me, Ahley Andreson a notary
public, personally appeared Scott Jenk	proved on the basis of satisfactory
executed the same voluntarily for its stated	bscribed to in this document, and acknowledged he/she purpose.
los estados de los estados est	ashir and an
	Notary Public
	Notary Public

SG Legal Approved as to Form: 01 40 2022

Long-Term Stormwater Maintenance Agreement Page 6 of 8

20220036045 07/21/2022 11:57:47 AM Rage 7 of 31 Washington County LONG-TERM STORMWATER MAINTENANCE AGREEMENT **EXHIBIT A** Cegal Description(s) Parcel SG-5-3-17-332 LEGAL DESCRIPTION (AS SHOWN ON WASHINGTON COUNTY RECORDS) S: 17 T: 43S R: 15W SEC 17 T43S R15W DESC AS FOL: BEG N88*45'22 W 1187.23 FT ALG SEC/L & NO* E 225.25 FT FM S1/4 COR SEC 17; TH N20*38'11 W 656.56 FT; TH N63*57'53 W 107.50 FT; TH S51*04'03 W 336.80 FT; TH S35*25'20 E 662.44 FT TO 1450 FT RAD/CUR RGT; (BEARS TO RAD PT \$28*0'31E); TH NELY THRU CTL ANG 08*5327 ALG ARC CUR 225 FT TO POB. (PROP LOT 11A) SG Legal Approved as to Form: 01.10.2022 Long-Term Stormwater Maintenance Agreement Page 7 of 8

20220036045 07/21/2022 11:57:47 AM Rage 8 of 31 Washington County

LONG-TERM STORMWATER MARTENANCE AGREEMENT

Exhibit B

Schedule of Long-Term Maintenance Activities City of St. George, Utah

Activity Inspection Biennial Owner shall report biennially to the City on the City's appreved forms or City's online reporting system, detailing compliance with the requirements of this Agreement. Mowing and maintenance of depending on vegetation wegetation and desired aesthetics Remove trash and debris Remove trash and debris Trash and debris shall be removed from the Property regularily to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures Inspect and maintain inlet and outlet structures Monthly The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of properly, offsite.	?X\	<u> </u>		
City's approved forms or City's online reporting system. detailing compliance with the requirements of this Agreement. Mowing and maintenance of depending on vegetation wegetation and desired aesthetics Remove trash and debris As needed or following each storm As needed or following each storm Inspect and maintain inlet and outlet structures Monthly Inspect and maintain inlet and outlet structures Sediment removal Variable (2-5 years is typical) Tity's approved forms or City's online reporting system, detailing compliance with the requirements of this Agreement. Landscaping and vegetation should be cared for throughout the year to ensure that proper sediment removal and infiltration is maintained. All trimmings shall be removed from the Property. Trash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures. These need to be cleaned regularly. The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		Activity	Frequency	Notes Notes
Mowing and maintenance of depending on vegetation and desired aesthetics Remove trash and debris Inspect and maintain inlet and outlet structures Sediment removal Variable, depending on vegetation and desired aesthetics As needed or following each storm Sediment removal Variable (25) years is typical) System, detailing compliance with the requirements of this Agreement. Landscaping and vegetation should be cared for throughout the year to ensure that proper sediment removal and infiltration is maintained. All trimmings shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures hese need to be cleaned regularly. The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		Inspection	Biennial	Owner shall report biennially to the City on the
Mowing and maintenance of depending on vegetation wegetation and desired aesthetics Remove trash and debris Remove trash and debris Inspect and maintain inlet and outlet structures Sediment removal Variable, depending on vegetation and desired aesthetics As needed or following each storm As needed or following each storm Monthly Inspect and maintain inlet and outlet structures Sediment removal Variable (2-5 years is typical) The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed or		74	0,	City's approved forms or City's online reporting
Mowing and maintenance of depending on vegetation wegetation and desired aesthetics Remove trash and debris Remove trash and debris Inspect and maintain inlet and outlet structures Sediment removal Variable, depending on vegetation and desired aesthetics As needed or following each storm Monthly Inspect and maintain inlet and outlet structures Sediment removal Variable (2-5) years is typical) Tash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of			>	system, detailing compliance with the requirements
maintenance of vegetation desired aesthetics Remove trash and debris As needed or following each storm Inspect and maintain inlet and outlet structures Sediment removal Variable (25) years is typical) We getation and desired aesthetics As needed or following each storm Trash and debris shall be removed from the Property. Trash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures phese need to be cleaned regularly. The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed or				of this Agreement.
removal and infiltration is maintained. All trimmings shall be removed from the Property. Remove trash and debris As needed or following each storm As needed or following each storm Trash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures hese need to be cleaned regularly. Inspect and maintain inlet and outlet structures Monthly The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed or		Mowing and	Variable,	Landscaping and vegetation should be cared for
Remove trash and debris As needed or following each storm As needed or following each storm Trash and debris shall be removed from the Property. Trash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures. These need to be cleaned regularly. Inspect and maintain inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		maintenance of		
Remove trash and debris As needed or following each storm Trash and debris shall be removed from the Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures phese need to be cleaned regularly. Inspect and maintain inlet and outlet structures Monthly The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		vegetation	vegetation and	
debris following each storm Property regularly to ensure that the Facilities function properly and operate effectively. Trash often collects at inlet and outlet structures. These need to be cleaned regularly. Inspect and maintain inlet and outlet structures should be inspected for damage and proper operation. The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of	_	0 1	desired aesthetics	trimmings shall be removed from the Property.
storm function properly and operate effectively. Trash often collects at inlet and outlet structures. Phese need to be cleaned regularly. Inspect and maintain inlet and outlet structures should be inspected for damage and proper operation. Variable (2-5) years is typical) The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of	3	Remove trash and	As needed or	Trash and debris shall be removed from the
often collects at inlet and outlet structures. These need to be cleaned regularly. Inspect and maintain inlet and outlet structures Sediment removal Variable (2-5 years is typical) The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		debris	following each	Property regularity to ensure that the Facilities
Inspect and maintain inlet and outlet structures Sediment removal Variable (25) years is typical) The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of	-		storm	function properly and operate effectively. Trash
Inspect and maintain inlet and outlet structures Sediment removal Variable (2-5) years is typical) The inlet and outlet structures should be inspected for damage and proper operation. The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		70		often collects at inlet and outlet structures. These
maintain inlet and outlet structures Sediment removal Variable (2-5) years is typical) The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of			\	need to be cleaned regularly.
outlet structures Sediment removal Variable (2-5) years is typical) The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		Inspect and	Monthly	The inlet and outlet structures should be inspected
Sediment removal Variable (2-5) years is typical) The removal of sediment is necessary if the Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of		maintain inlet and		for damage and proper operation.
years is typical) Facilities begin to lose capacity or effectiveness. The Owner will remove and dispose of all accumulated sediments which shall be disposed of				
The Owner will remove and dispose of all accumulated sediments which shall be disposed of		Sediment removal	Variable (2-5)	The removal of sediment is necessary if the
accumulated sediments which shall be disposed of			years is typical)	Facilities begin to lose capacity or effectiveness.
			* O.	
properly, offsite.	,			accumulated sediments which shall be disposed of
				properly, offsite.

SG Legal Approved as to Form: 01,10,2022

Long-Term Stormwater Maintenance Agreement Page 8 of 8

20220036045 07/21/2022 11:57:47 AM Rage 9 of 31 Washington County ing Term Stormwater Management Plan **EXHIBIT** C Long-Term-Stormwater Managemen Plan for: Great Western Supph St. George, Utah Owner: Coyote Club, LC 2425 South 3200 West \$alt Lake City, Utah 84119 (801) 698-7422 Property Manager: Coyote Club LC 2425 South 3200 West Salt Lake City, Utah 84119 (801) 698-7422 Parcel #: SG-5 Long-Term Stormwater Management Plan updated 10/01/2019

20220036045 07/21/2022 11:57:47 AM Rage 10 of 31 Washington County

Great Western Supply
Long Term Stormwater Management Plan
July 2022

SG-5-3-17-332

S: 17 T: 43S R: 15W SEC 17 T43S R15W DESC AS FOL: BEG N88*45'22 W 1187.23 FT ALG SEC/L & N0* E 225.25 FT FM S1/4 COR SEC 17; TH N20*38'11 W 656.56 FT TH N63*57'53 W 107.50 FT TH S51*04'03 W 336.80 FT: TH S35*25'20 E 662.44 FT TO 1450 FT RAD CUR RGT, (BEARS TO RAD PT S28*0'31E); TH NELY THRU CTL ANG 08*53'27 ALG ARC CUR 225 FT TO POB. (PROP LOT 11A)

PURPOSE AND RESPONSIBILTY

As required by the Clean Water Act and resultant local regulations, including St. George Municipal Separate Storm Sewer Systems (MS4) Permit, those who develop land are required to build and maintain systems to minimize litter and contaminants in stormwater runoff that pollute waters of the State.

This Long-Term Stormwater Management Plan (LTSWMP) describes the systems, operations and the minimum standard operating procedures (SOPs) necessary to manage pollutants originating from or generated on this property. Any activities or site operations at this property that contaminate water entering the City's stormwater system, groundwater and generate loose litter must be prohibited, unless SOPs are written to manage those activities or operations, and amended into this LTSWMP.

CONTENTS

SECTION 1: SITE DESCRIPTION, USE AND IMPACT

SECTION 2: TRAINING

SECTION 3: RECORDINE

SECTION 4 APPENDICES

Rage 11 of 31

Great Western Supply ong Term Stormwater Management Plan July 2022

SECTION 1: SITE DESCRIPTION, USE AND IMPACT

The site infrastructure at our site is limited at controlling and containing pollutants and our operations if managed improperty can contaminate the environment. This LTSWMP includes standard operations procedures (SOP)s that are intended to compensate for the pollution containment limitations of our site infrastructure and direct our maintenance operations to responsibly manage our grounds.

Building and Parking Areas

Stormwater and floating debris from areas west of the project area generally flow to the east and collects in a storm drain inlet west of the rock wall. This storm drain inlet routes storm water through storm drain facilities to an existing storm drain network along Commerce Drive, which outfalls to Eth Pierce Wash. Stormwater and floating debris to the east of the rock wall generally flow east and is collected in storm drain inlets along the concrete waterway and curb and gutter. Storm water is routed through storm drain facilities to an existing storm drain network along Commerce Drive, which outfalls to Ft. Pierce Wash. Maintenance involves regular sweeping, but it can also involve pavement washing to remove stains, slick spots and improve appearance when necessary. Pavement Maintenance and the Pavement Washing SOPs included in this document will be used to manage pollutants that collect on pavements.

Landscaping

Property landscape operations can result in grass clippings, leaves, sticks, branches, dirt, mulch, fertilizers, pesticides and other pollutants to fall or be left on paved areas. This waste material will settle in the storm drain system and solid and dissolved waste in the runoff can pass through the storm drain system ultimately polluting Ft. Pierce Wash. Landscape Maintenance SOPs included in this document will be implemented to reduce pollutants entering into the storm drain system, which outfalls to Ft. Pierce Wash.

Storm Drain System

Stormwater and floating debris from areas west of the project area generally flow to the east and collects in a storm drain inlet west of the rock wall. This storm drain inlet routes storm water through storm drain facilities to an existing storm drain network along Commerce Drive, which outfalls to Ft. Pierce Wash. Stormwater and floating debris to the east of the rock wall generally flow east and is collected in storm drain inlets along the concrete waterway and curb and gutter. Storm water is routed through storm drain facilities to an existing storm drain network along Commerce Drive, which outfalls to the Pierce Wash. The Storm Drain Maintenance SOP included with this document should be implemented to reduce pollutants entering Ft. Pierce Wash, and to prevent mosquito breeding.

Waste Management

Dumpsters and trash receptacles will be maintained by the property owner and collected on a weekly basis. These structures are designed to reduce the amount of trash

20220036045 07/21/2022 11:57:47 AM Rage 12 of 31 Washington County

> Great Western Supply. ong Term Stormwater Management Plan July 2022

accumulated within the property and are intended to prevent precipitation exposure minimizing liquids that can leak onto pavements. Dumpster pads and the building pad slope toward pavement and any waste left outside the trash receptacles can be carried by or leach into stormwater runoff. The Waste Management SOP included in this document will be implemented to control and manage the solid waste generated onsite.

Utility System

Utility infrastructure's exposed to roof drains which drain to hardscape within project. HVAC units contains oils and other chemicals that can harm Ft. Pierce Wash if allowed to drain off the property. Liquids and other waste generated by maintenance of this system can be appropriately managed by the Spill Containment and Cleanup SOP included with this document.

20220036045 07/21/2022 11:57:47 AM Rage 13 of 31 Washington County

Great Western Supply
Long Term Stormwater Management Plan
July 2022

SECTION 2: TRAINING

Ensure that all employees and maintenance contractors know and understand the SOPs specifically written to manage and maintain the property. Maintenance contractors must use the stronger of their Company and the LTSWMP SOPs. File all training records in an attached spreadsheet.

SECTION 3: RECORDINE

Maintain records of operation and maintenance activities in accordance with SQPs. Mail a copy of the record to St. George City Stormwater division annually.

20220036045 07/21/2022 11:57:47 AM Rage 14 of 31 Washington County

Great Western Supply
Long Term Stormwater Management Plan
July 2022

SECTION 4:

Site Drawings and Details
SOPs
Recordkeeping Documents

Long-Term BMP's inspection and maintenance schedule


Long-Term BMP's are required to be inspected by a qualified person during the installation to ensure the control is properly installed, with follow up inspections and a maintenance schedule as provided below. A list of BMP's and inspection schedule is shown below as listed in Exhibit B.

A A	a a a a a a a a a a a a a a a a a a a	n
List of BMP's	Describe the inspection and maintenance schedule	
Parking Lot Cleaning/Maintenance	Weekly walk-through and twice annual comprehensive	
Mulch and Soils	Twice annually	
Mowing and Trimming	Walkthrough and Clean up following regular maintenance	NO.
Fertilizer	Walkthrough and Clean up following each application	y .
Storm Inlets	Twice annually	
Cleanout box	Twice annually	
Roof Drains	Twice annually	
Floor Drains	Twice annually	
Leaves - Autumn Cleanup	Once annually in the fall (prior to cold) weather conditions)	ll.
Trash and Debris	Twice annually	- 60 g
HVÁC	Twice annually	
Underground Injection Contro (UIC)	Twice annually	

)

-Jud6045 Rajoe 15 of 31 07/21/2022 11:57:47 AM Washington County Long Term Stormwater Management Plan July 2022 SITE DRAWINGS AND DETAILS Long-Term Stormwater Management Plan updated 10/01/2019

07/21/2022 11:57:47 AM 20220036045 Washington Rage 16 of 31

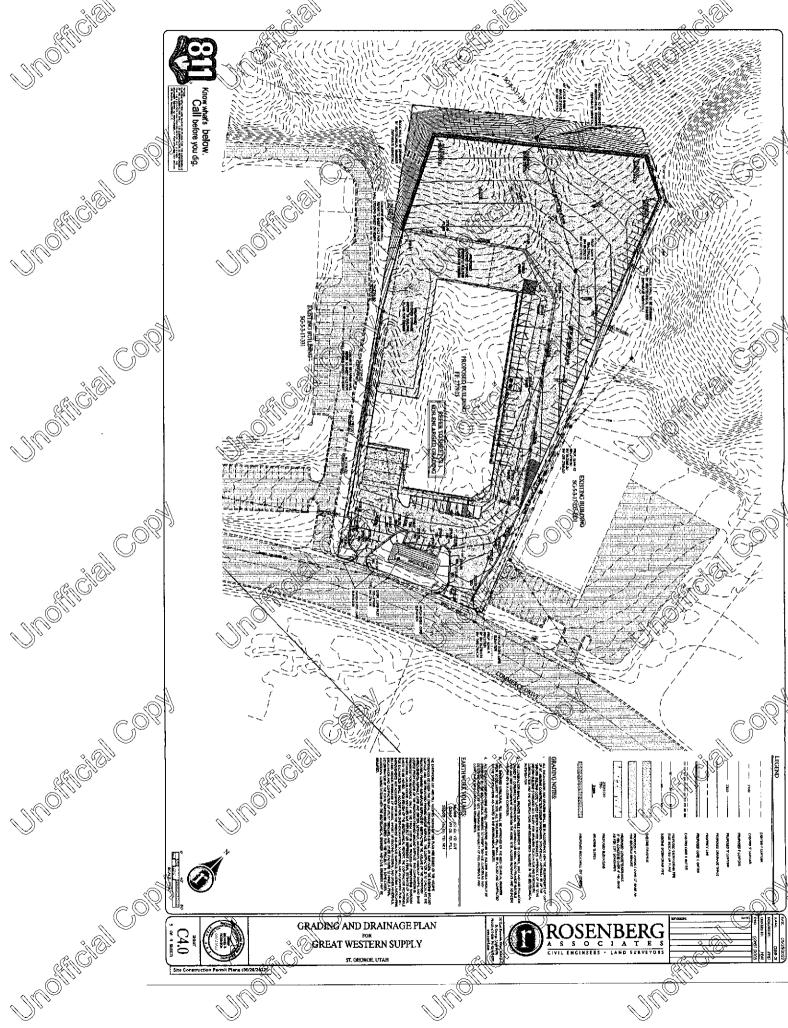

07/21/2022 11:57:47 AM 20220036045 Rage 17 of 31 Washington County Know what's below.
Call before you dig. ENLARGED GRADING AND DRAINAGE PLAN ROSENBERG GREAT WESTERN SUPPLY

Great Western Supply
Long Term Stormwater Management Plan
July 2022

SOPs

Buildings - Parking Lot Maintenance

Standard Operating Procedure

PURPOSE:

To prevent pollution of stormwater run-off from parking lots.

PROCEDURE:

- 1. Preparation:
 - a. Conduct employee training to reinforce proper housekeeping annually and at hire.
 - b. Restrict parking in areas to be swept prior to and during sweeping.
 - c. Perform regular maintenance and services in accordance with the recommended vehicle maintenance schedule on sweepers to increase and maintain efficiency.

2. Process:

- a. Sweep parking areas, as needed, or as directed.
- b. Hand sweep sections of gutter if soil and debris accumulate.
- c. Pick-up litter as required to keep parking areas clean and orderly.

3. Clean-up:

- a. Dispose of sweepings properly (designated solid waste facility).
- b. Street sweepers to be cleaned out in a manner as instructed by the manufacturer and in a location that swept materials cannot be introduced into the stormdrain.
- c. Swept materials will for be stored in locations where stormwater could transport lines into the storm drain system.

4. Documentation

- a. Retain work orders to track swept parking areas and approximate quantities
- b. Log training activities along with regular required safety training.

Great Western Supply Long Term Stormwater Management Plan
July 2022

Landscape Maintenance Operations

Standard Operating Procedure

PURPOSE:

To protect stormwater by properly preventing any solids, liquids or any light weight material from being carried away from the building by wind or water including application of pesticides, herbicides, & fertilizers.

PROCEDURE:

- 1. Preparation:
 - a. Make sure to follow all recommended SDS and MSDS instructions before handling any chemicals.
 - b. Make sure all pesticide application is conducted following manufacturer's recommendations.
 - c. Calibrate fertilizer and pesticide application equipment to avoid excessive application.
 - d. Use pesticides only if there is an actual pest problem.
 - e. Time and apply the application of fertilizers, herbicides or pesticides according to the manufacturer's recommendation for best results ("Read the Label").
 - f. Know the weather conditions. Do not use pesticides if rain is expected within a 24- hour period. Apply pesticides only when wind speeds are low (less than 5 mph).

2. Process:

- a. Follow the manufacturer's recommendations for mixing applying, and disposing of pesticides ("Read the Label").
- b. Grooming:
- Lawn Mowing Immediately following operation sweep or blow clippings onto vegetated ground.
- Fertilizer Operation Prevent overspray. Sweep or blow fertilizer onto vegetated ground immediately following operation.
- Pesticide Operation Prevent overspray, use spot treatment, sweep or blow dry pesticide onto vegetated ground immediately.
- Remove or contain all erodible or loose material prior to forecast wind and precipitation events, before any non-stormwater will

Great Western Supply
Long Term Stormwater Management Plan
July 2022

pass through or over the site.

- Landscape project materials and waste can usually be contained or controlled by operational BMP's.
- Operational; including but not limited to:
 - Strategic staging of materials eliminating exposure such as not staging on pavement
 - Avoiding multiple day staging of landscaping backfill and spoil on payements
 - > Haul off spoil as generated or daily
 - Scheduling work when weather forecasts are clear.

3. Cleanup

- a. Remove or contain all erodible or loose material prior forecast wind and precipitation events, before any non-stormwater will pass through and over the project site and at end of work period. Light weight debris and landscape materials can require immediately attention when wind expected.
- b. Landscape project materials and waste can usually be contained or controlled by operational best management practices.
- Operational; including but not limited to:
 - Strategic staging of materials eliminating exposure, such as not staging on pavement
 - > Avoiding multiple day staging of landscaping backfill and spoil on pavements
 - > Haul off spoil as generated or daily
 - Scheduling work when weather forecasts are clear.
- Use dry cleanup methods, e.g. square nose shoveland broom and it is usually sufficient when no more material can be swept onto the square nosed shovel.
- Power blowing tools

4. Waste Disposal:

a. Dispose of waste according to Building Waste Management SOP, unless superseded by specific SOPs for the operation.

5. Equipment:

- a. Tools sufficient for proper containment of pollutants and cleanup.
- b. Push broom and square blade shovel should be a minimum.

6. Training:

- a. Annually and at hire
- b. Landscape Service Contractors must have equal or better SOPs.

Great Western Supply Ong Term Stormwater Management Plan
July 2022

Building Waste Management

Standard Operating Procedure

PURPOSE:

To prevent pollution of stormwater from improper handling of garbage and maintenance of dumpsters.

PROCEDURE&

1. Preparation:

- a. Train employees on proper trash disposal annually and at hire.
- b. Locate dumpsters and trash cans in convenient, easily observable areas.
- c. Provide properly-labeled recycling bins to reduce the amount of garbage disposed.
- where feasible, install berms, curbing, or vegetation strips around storage areas to control water from entering and leaving storage areas.

2. Process:

- a. Inspect garbage bins for leaks regularly, and have repairs made immediately by responsible party.
- b. Request/use dumpsters, and trash cans with lies and without drain holes.
- c. Locate dumpsters on a flat, hard surface that does not slope or drain directly into the storm drain system.

3. Clean tup:

- (a). Keep areas around dumpsters plean of all garbage.
 - o. Ensure garbage bins emptied regularly to keep from overfilling.
 - c. Wash interior of bins or dumpsters, as needed, in properly designated areas.
- 4. Waste Disposal Restrictions for all waste for the Landfill
 - a. Generally, most waste generated at this property, and waste from spill and cleanup operations can be disposed in dumpsters under the conditions listed in the SOP. Unterstother disposal requirements are specifically identified by the product SDS or otherwise specified in the SOP's.
 - b. Know the facility disposal requirements and restrictions. It should not be assumed that all waste disposed in collection devices will be disposed at the Landfill.
 - c. Review Landfill regulations for additional restrictions and understand what waste is prohibited in the Landfill. Ensure the SDS and Landfill

Great Western Supply ong Term Stormwater Management Plan July 2022

regulations are not contradictory.

Storm Drain Maintenance Operations

Standard Operating Procedure

PURPOSE:

To prevent pollution of stormwater from sediment and debris.

PROCEDURE;

- Preparation:
 - Train all employees at hire and annually.
 - **Locate Storm Drain**
 - Inspect for need
- Process.
- a. Schedute cleaning for boxes and pipe that contain 2" or more of sediment and debris.
- Remove debris by vacuum operated machinery
- When accumulations are mostly floating debris this material can be removed with a net.
- 3. Cleanup
 - Dispose of waste collected by machinery at regulated facilities.
 - b. Floating materials and floating absorbern materials may be disposed in dumpster when dried out. Dry diff and slurry may also be disposed in the dumpster.
 - Disposal of hazardous waste
 - 1. Dispose of hazardous waste at regulated disposal facilities, see Waste Management and Spill Control SOP
 - Disposal of waste collected from sanitary sewer device at regulated facilities.

Great Western Supply
Long Term Stormwater Management Plan
July 2022

Pavement Washing Operations

Standard Operating Procedure

PURPOSE:

To prevent waste fluids and detergents from entering the storm drain system.

PROCEDURE:

- 1. Preparation:
 - a. Dam the inlet using a boom material that seals itself to the pavement and pick up the wastewater with shop vacuum or absorbent material.
 - b. Training annually and at hire
- 2. Process:
 - a. Collect wastewater with a shop vacuum simultaneously with the washing operation.
- 3. Cleanup
 - a. Small volumes can usually b e drained to the local sanitary sewer. Contact St. George City Wastewater department at 435-627-4256 $^\circ$
 - b. Large volumes must be disposed at regulated facilities.
 - c. Pavement washing is determined by conditions that warrant it, including but not limited to prevention of slick or other hazardous conditions or restore acceptable appearance of pavements.

Great Western Supply ng Term Stormwater Management Plan

General Construction Maintenance

Standard Operating Procedure

PURPOSE:

To prevent any solids, liquids or light-weight materials from being carried away from the construction or maintenance project by wind or water to the storm drain.

PROCEDURE:

- 1. Preparation:
 - a. This SOP should provide sufficient direction for many of the general operations, e.g., building maintenance, curb/sidewalk/flatwork, overlay/patching, landscape renovations, misc. maintenance/repairs, etc.
 - b. Training at hire and annually.
- Process:
 - Remove or contain all erodible or loose material proof forecast wind and precipitation events or before non-stormwater will pass through the project site For light weight debris maintenance can require immediately attention for wind events and many times daily maintenance or as needed for precipitation or nonstormwater events.
 - Project materials and waste can be contained or controlled by operational or structural best management practices.
 - Operational; including but not limited to:
 - Strategic staging of materials eliminating exposure, such as not staging on pavement
 - Avoiding multiple day staging of backfill and spoil
 - Haul off spoil as generated of daily
 - Schedule work during clear forecast
 - Structural; including but not limited to:
 - Inlet protection, e.g. wattles, filter fabric, drop inlet bags, boards, planks
 - Gutter dams, e.g. wattles, sandbags, dirt dams
 - Boundary containment, e.g. wattles, silt fence
 - Dust control, e.g. water hose,
 - Waste control, e.g. construction solid or liquid waste containment dumpster, receptacles
 - Inspection often to insure the structural best management practices are in good operating condition and at least prior to the workday end. Promptly repair damaged best management practices achieving effective containment.
- Cleanup:

Rage 25 of 31 20220036045 07/21/2022 11:57:47 AM Washington County

> Great Western Supply Long Term Stormwater Management Plan July 2022

- Use dry cleanup methods, e.g. square nose shove and broom.
- Wet methods are allowed if wastewater is prevented from entering the b. stormwater system, e.g. wet/dry vacuum, disposal to our landscaped areas.

Dispose of waste according to General Waste Management SOP, unless superseded by specific SOPs for the operation.

Never discharge waste material to storm dains d.

Great Western Supply
Long Term Stormwater Management Plan
July 2022

Spill Control

Standard Operating Procedure

PURPOSE:

To protect stormwater by educating employees on proper spill cleanup procedures, state reporting requirements, and preventative actions.

PROCEDURE:

- 1. Always:
 - a. Stop the source of the spill, if possible, to safely do so.
 - b. Contain any liquids, if possible, to safely do so.
 - c. Cover the spill with absorbent material such as kitty litter, sawdust, or oil absorbent pads. Do not use straw or water (See SOP #8 Petroleum and Chemical Disposal).
 - d. Petroleum spills involve, but are not limited to: crude oil, gasoline, various fuel oils, lubricating oil, hydraulic oil, asphaltic residuals.
 - e. Report a petroleum spill (435) 627-4142 if:
 - i. The spill is greater than 25 gallons, or
 - ii. The spill cannot be immediately contained, or
 - iii. The spill and/or contamination cannot be completely removed within 24 hours, or
 - iv. There is an impact or potential impact to ground/surface water.
 - v. IF INDOUBT, REPORT THE SPILL
 - f. Hazardous materials spills involve non-oil spills that pose a threat to human health or the environment, such as chemical releases.
 - Report any discharge of hazardous waste immediately (within one hour) to local emergency officials (fire department), then contact Health Department Emergency Response Team (435) 673-3528.
 - ii. Contact local fire department (435) 627-4150
 - iii. Develop and maintain a Spill Prevention, Control, and Countermeasure (SPCC) Plan if the facility stores more than \$320 gallons of petroleum.
 - g. Fit petroleum and chemical storage containers with secondary containment structures.
 - h. Keep a spill kit in areas where petroleum or hazardous materials are stored.
 - i. Frain employees in spill response procedures and equipment.
 - j. Deploy containment booms if spill could potentially reach a storm drain or water body.
 - k. Position mats to contain drips from equipment or vehicles until they can be repaired.

Great Western Supply
Long-Term Stormwater Management Plan
July 2022

2. Cleanup

- a. NEVER WASH SPILLS TO THE STORM DRAIN SYSTEM
- b. Clean per SDS requirements but generally most spills can be cleaned up according to the following:
- Absorb liquid spills with spill kit absorbent material, sand or dirt until liquid is sufficiently converted to solid material.
- Remove immediately using dry cleanup methods, e.g. broom and shovel, or vacuum operations.
- Cleanup with water and detergents may also be necessary depending on the spilled material. However, the waste from this operation must be vacuumed or effectively picked up by dry methods. See Pavement Washing SOP.
- Repeat process when residue material remains.
 - c. Follow SDS requirements but usually most spills can be disposed per the following b. & c.
 - d. Generally, most spills absorbed into solid forms can be disposed to the dumpster and receptacles. Follow Waste Management SOP.
 - e. Generally, Liquid waste from surface cleansing processes may be disposed to the sanitary sewer system after the following conditions have been met
- Dry cleanup methods have been used to remove the bulk of the spill and disposed per the Waste Management SOP.
- The liquid waste amounts are small and diluted with water. This is intended for spill cleanup waste only and never for the disposal of unused or spent liquids.

3. Documentation:

a. Documentall spills in spreadsheet.

4. SDS sheets:

a. SDS Manual is filed in break room.

5, Materials:

a. Generally, sand or dirt will work for most cleanup operations and for containment. However, it is the responsibility of the owner to select the absorbent materials and cleanup methods that are required by the SDS Manuals for chemicals used by the company.

8. Training:

a. Annually and at hire.

Rage 28 of 31 07/21/2022 11:57:47 AM Washington County Long Term Stormwater Management Plan July 2022 PLAN RECORDKEEPING DOCUMENTS Long-Term Stormwater Management Plan updated 10/01/2019

20220036045 07/21/2022 11:57:47 AM Rage 29 of 31 Washington County

Great Western Supply
Long-Term Stormwater Management Plan
July 2022

MAINTENANCE/INSPECTION SCHEDULE

Frequency		Site Infrastructure.		Rs
<u> </u>				03/
$\mathbf{\tilde{w}}$	Weekly Cleaning/Maintenance) //
M, S	Storm Inlets			
A, S	Roof Drains	Ø. C.		
A	HVAC			
M, S	Dumpsters/Frash Receptacles	7:00	100 m	
M, S	Landscape Areas			
W	Parking Lots Cleaning/Maintenance			
M, S	Retention Facilities			
			<u> </u>	R
				18) s
				•
•	÷ 60	* O)		
		CION CONTRACTOR OF THE PROPERTY OF THE PROPERT		

Inspection Frequency Key: A=annual, Q=Quarterly, M=monthly, W=weekly, S=following appreciable storm event, U=Unique infrastructure specific (specify)

RECORD INSPECTIONS IN THE MAINTENANCE LOG

Inspection Means: Either; Traditional walk through, Awareness/Observation, and during regular maintenance operations while noting efficiencies/inefficiencies/concerns found, etc.

20220036045 07/21/2022 11:57:47 AM Rage 30 of 31 Washington County

Great Western Supply
Long-Term Stormwater Management Plan
July 2022

MAINTENANCE LOG

Date	Maintenance Performed/Spill Events: Perf Maintenance per SOPs	Observation Notes, including but not limits System Performance (effectiveness/ineffic Necessary Ch	d to; Inspection results, Observations, initials tiercies), SOP Usefulness, Concerns,
	7.00	100	
	100		(0)
& C)			

Contact the Stormwater Division for an example of a maintenance inspection log

Angulal Summary of LTSWMP effectiveness, inefficiencies, problems, necessary changes etc.

You may create your own form that provides this same information or request a word copy of this document.

07/21/2022 11:57:47 AM 20220036045 Rage 31 of 31 Washington County Great Western Supply ong Term Stormwater Management Plan July 2022 Annual SOP Training Log per Section 2 Date Employee Name / Maintenance Contractor Co Trainer *You may create your own form that provides this same information or request a word copy of this document. Long-Term Stormwater Management Plan updated 1001/2019